



DIN2565 PN6 THREADED WITH NECK FLANGES

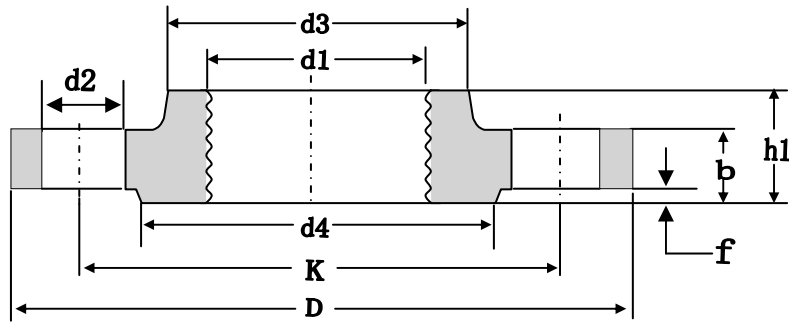

UNIT:mm

DN	Flange				Hub			Drilling		Weight
	D	b	k	h1				NO	d2	
10	75	12	50	20	25	35	2	4	11.5	0.32
15	80	12	55	20	30	40	2	4	11.5	0.37
20	90	14	65	24	40	50	2	4	11.5	0.58
25	100	14	75	24	50	60	2	4	11.5	0.73
32	120	14	90	26	60	70	2	4	14	1.05
40	130	14	100	26	70	80	3	4	14	1.2
50	140	14	110	28	80	90	3	4	14	1.54
65	160	14	130	32	100	110	3	4	14	1.87
80	190	16	150	34	110	128	3	4	18	2.78
100	210	16	170	38	130	148	3	4	18	3.07
150	240	18	200	40	160	178	3	8	18	4.33
200	285	18	225	44	185	202	3	8	18	4.81


DIN2566 PN10/16 THREADED WITH NECK FLANGES

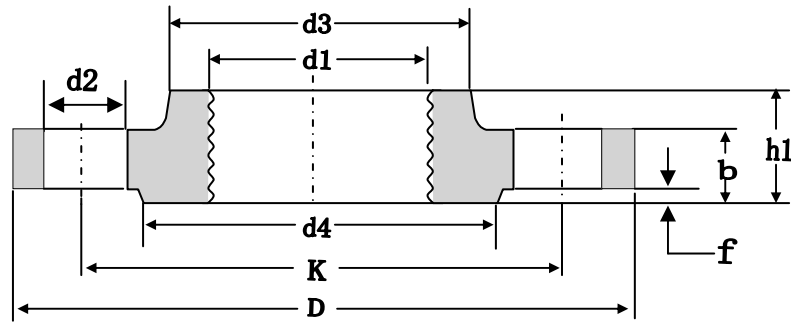

UNIT:mm

DN	Flange				Hub		f	Drilling		Weight kgs/pc
	D	b	k	h1	d3	d4		NO	d2	
10	90	14	60	20	30	40	2	4	14	0.56
15	95	14	65	20	35	45	2	4	14	0.62
20	105	16	75	24	45	58	2	4	14	0.92
25	115	16	85	24	52	68	2	4	14	1.1
32	140	16	100	26	60	78	2	4	18	1.59
40	150	16	110	26	70	88	3	4	18	1.77
50	165	18	125	28	85	102	3	4	18	2.41
65	185	18	145	32	105	122	3	4	18	3.13
80	200	20	160	34	118	138	3	4	18	3.95
100	220	20	180	38	140	158	3	8	18	4.38
125	250	22	210	40	168	188	3	8	18	5.99
150	285	22	240	44	196	212	3	8	22	7.42

DIN2567 PN25/40 THREADED WITH NECK FLANGES

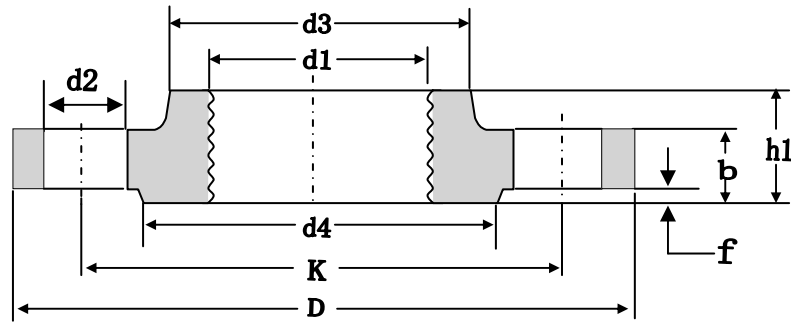

UNIT:mm

DN	Flange				Hub		f	Drilling		Weight kgs/pc
	D	b	k	h1	d3	d4		NO	d2	
10	90	16	60	22	30	40	2	4	14	0.63
15	95	16	65	22	35	45	2	4	14	0.71
20	105	18	75	26	45	58	2	4	14	1.03
25	115	18	85	28	52	68	2	4	14	1.28
32	140	18	100	30	60	78	2	4	18	1.87
40	150	18	110	32	70	88	3	4	18	2.14
50	165	20	125	34	85	102	3	4	18	2.85
65	185	22	145	38	105	122	3	8	18	3.85
80	200	24	160	40	118	138	3	8	18	4.8
100	235	24	190	44	145	162	3	8	22	6.43
125	270	26	220	48	170	188	3	8	26	8.77
150	300	28	250	52	200	218	3	8	26	10.5